





## Check Valves

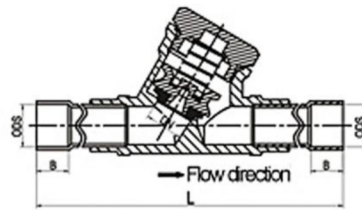

1. Maximum working air pressure : 4,5Mpa, hydraulic pressure : 6,8Mpa
2. Suitable with : R22, R502, R407c, R410a, R134a, R404a, R600a etc. refrigerants and other refrigerant oils
3. Working temperature : -40°C ~ 140°C
4. Unless otherwise specified standart on : GB/T 12233-89

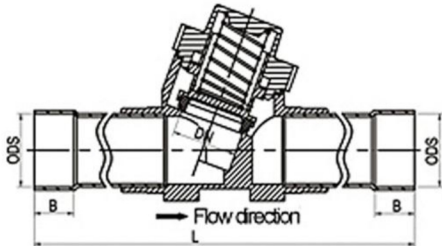

MODEL	ODS		DN	B	L	Q'ty carton	Gross weight (kg)	Carton dimension (cm)
	mm	inch						
LCVC01	16	5/8"	18	12	150	60	21	46*36*28
LCVC02	18		18	16	180	40	20	
LCVC03	--	3/4"	18	16	180	40	20	
LCVC04	22	7/8"	18	20	190	40	25	
LCVC05	25	--	18	20	190	20	14	
LCVC06	--	1"	18	20	190	20	14	
LCVC07	28	--	25	20	220	14	16	
LCVC08	--	1-1/8"	25	20	220	14	16	
LCVC09	35	1-3/8"	40	20	250	10	29	
LCVC10	42	--	40	25	300	10	28	
LCVC11	--	1-5/8"	40	25	300	10	28	
LCVC12	54	2-1/8"	40	25	305	7	21	



MODEL	ODS		DN	B	L	Q'ty carton	Gross weight (kg)	Carton dimension (cm)
	mm	inch						
LCVB01	16	5/8"	18	12	84	120	33	46*36*28
LCVB02	18		18	16	90	60	28	
LCVB03	--	3/4"	18	16	90	60	28	
LCVB04	22	7/8"	18	20	95	60	29	
LCVB05	25	--	18	20	95	40	21	
LCVB06	--	1"	18	20	95	40	21	
LCVB07	28	--	25	20	125	40	31	
LCVB08	--	1-1/8"	25	20	125	40	31	
LCVB09	35	1-3/8"	40	20	125	10	26	
LCVB10	42	--	40	25	155	10	24	
LCVB11	--	1-5/8"	40	25	155	10	24	
LCVB12	54	2-1/8"	40	25	155	7	19	